




Griddle Table + Grease Guard

Grill Station Flagship · Product Spec Sheet

A full outdoor kitchen, right on your cart

Product Drawing

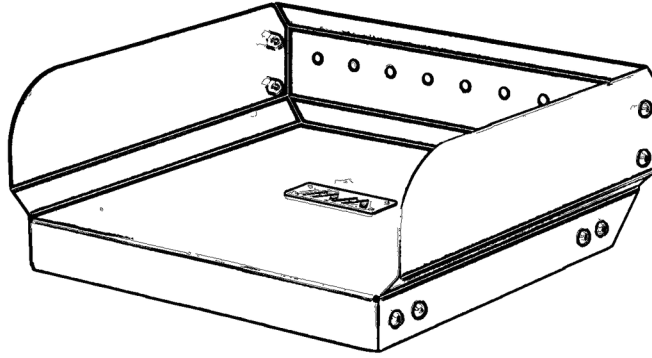

Specifications

Dimensions: 18 3/4" D × 19 5/8" W × 8" H

Weight: 24.25 lbs

Material: Welded steel + stainless steel hardware

Finish: Matte Black Powder Coat

Fitment: Denago Rover XL & XXL (forward-facing seat)

Mounting: Bolts onto HUB Mount front

Overview

The Griddle Table is part of the Grill Station line and turns your cart into a mobile grill station. The heavy gauge steel work surface is sized for a 17" Blackstone griddle (sold separately), while the integrated Grease Guard channels drips away and keeps your cart clean. Built for tailgating, campsite cooking, and backyard cookouts.

Key Features

- Fits 17" Blackstone griddle (sold separately)
- Integrated grease guard and drip channel
- Heavy duty welded steel construction
- Durable matte black powder coat
- Stainless steel hardware
- Mounts to HUB Mount (sold separately)

What's in the Box

- (1) Griddle Table + Grease Guard unit, fully assembled
- (2) Button Head Cap Bolt 3/8-16 × 3/4" stainless
- (2) Star Knob 3/8-16
- (2) Ball Lock Pin (stainless steel)
- (6) Flat Head Machine Screw M5-0.80 × 20 mm Phillips stainless (countersunk — hinges)
- (2) Pan Head Machine Screw M5-0.80 × 20 mm Phillips stainless (rounded — ball lock pins)
- (8) Hex Nut M5-0.8 stainless
- (8) Split Lock Washer M5 stainless
- Installation instructions

Installation

Tool required: 1 × 8 mm wrench + 1 × #2 Phillips screwdriver

Step 1. Hinges — use the 6 FLAT HEAD machine screws (countersunk heads sit flush; do NOT use the 2 pan head screws here — those are for Step 5). Place all 6 flat head screws into the two hinges attached to the Griddle Table base.

Step 2. Place the machine screws up through the designated holes on the bottom portion of HUB Front.

Step 3. Reach in from the side and on each hinge, attach 1 nut with split lock washer to the middle machine screw (3 per hinge).

Step 4. Attach the remaining 4 nuts with split lock washers and securely snug them.

Step 5. Ball lock pins — use the 2 PAN HEAD machine screws (rounded heads). Attach each ball lock pin lanyard on the INSIDE of HUB Mount with 1 pan head screw, hex nut, and split lock washer (one per side). This securely locks your Griddle Table down through the designated holes during travel.

Step 6. When in use, simply unpin each side, raise the table, and secure in HUB Front with a button head cap bolt and star knob on the back side of HUB.

Warranty

Lifetime warranty on welded joints and stainless steel hardware. Three (3) year warranty on powder coat finish and all other components.