




HUB Mount

Cart Mount Platform · Product Spec Sheet

The foundation for every Summit attachment

Product Drawing

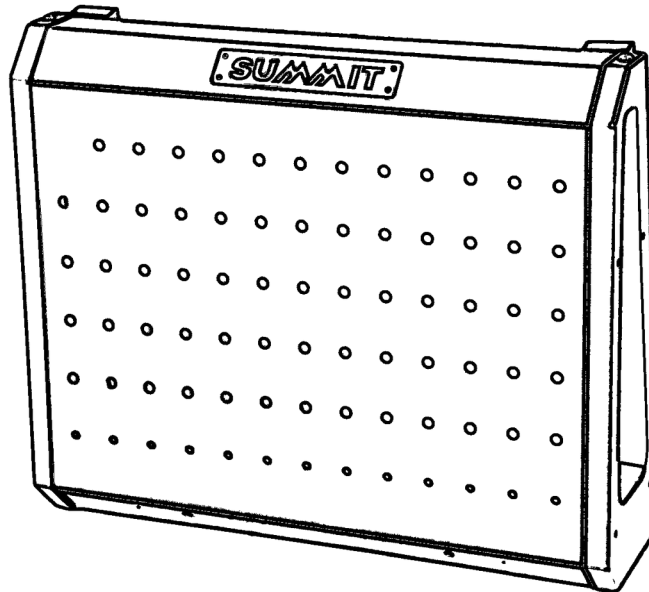

Specifications

Dimensions: 10 1/8" D × 29" W × 24 1/8" H

Weight: 24.59 lbs

Material: Welded steel + stainless steel hardware

Finish: Matte Black Powder Coat

Fitment: Denago Rover XL & XXL (forward-facing seat)

Mounting: Bolts permanently to rear cart frame using 4 included mounting brackets and 8 loose stainless bolts

Overview

The HUB Mount is the backbone of the Summit Cart Mods ecosystem, a heavy duty welded steel frame that bolts permanently to the rear of compatible golf carts, creating a universal attachment rail for every Summit accessory. Buy it once; expand your setup for life.

Key Features

- Universal platform for all Summit attachments
- Heavy duty welded steel construction
- Durable matte black powder coat
- Stainless steel hardware throughout
- Bolt on permanent installation
- Supports the full Summit attachment lineup

What's in the Box

- (1) HUB Mount unit, fully assembled
- (4) Mounting Bracket
- (8) Button Head Cap Bolt 3/8-16 × 3/4" stainless
- (8) Hex Nut 3/8-16 stainless
- (8) Lock Washer 3/8-16 stainless
- Installation instructions

Installation

Tool required: 1 × Allen wrench, 1/4" hex + 1 × 9/16" wrench

Step 1. Place the 4 mounting brackets on the rear portion of the cart frame, facing backward — two above the rear seat, two below.

Step 2. Have the 8 bolts ready.

Step 3. Attach the HUB Mount to the 4 brackets already in place.

Step 4. Insert 1 bolt through each of the top brackets into HUB Mount. (This will help hold it steady.)

Step 5. Insert 1 bolt through each of the bottom brackets into HUB Mount.

Step 6. Insert the remaining 4 bolts and tighten all securely.

Warranty

Lifetime warranty on welded joints and stainless steel hardware. Three (3) year warranty on powder coat finish and all other components.